




A full range of >B< ACR copper and copper alloy end feed capillary fittings.







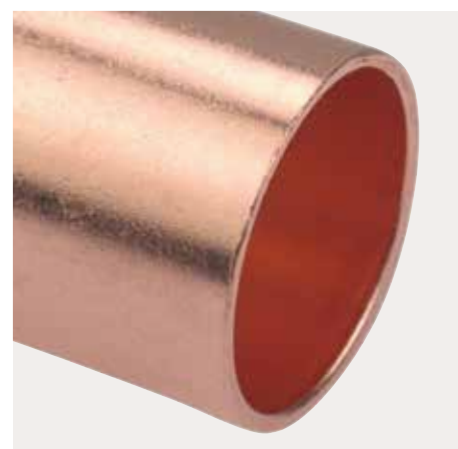
















**Features and Benefits:**

- Available in sizes from 1/4" to 4 1/8".
- Specifically designed to suit the ACR market.
- Designed and manufactured in copper and copper alloy fittings.
- All fittings conforms to Pressure Equipment Directives 97/23/EC for use with high and low pressure.
- Manufactured to ANSI B16.22 certification suitable for imperial air conditioning and refrigeration applications.
- Manufactured from thick wall copper tubes to ensure constant thickness to guarantee impermeability and durability.

Size (mm)	Safe working pressure (bar)	
	100°C	150°C
1/4	79	69
3/8	57	49
1/2	49	43
5/8	44	39
3/4	40	35
7/8	36	32
1-1/8	34	30
1-3/8	31	27
1-5/8	30	27
2-1/8	27	24



## ACR Range


<b>Straight Coupler</b>  <b>9600</b> From: 1/4" To: 4.1/8"	<b>Slip Coupler</b>  <b>9601</b> From: 1/4" To: 4.1/8"	<b>Female Straight Connector</b>  <b>9603</b> From: 1/4 x 1/8" To: 2.1/8 x 1.1/2"	<b>Male Straight Connector</b>  <b>9604</b> From: 1/2" To: 1.5/8 x 1.1/4"	<b>Fitting Reducer</b>  <b>96002</b> From: 3/8 x 1/4" To: 4.1/8 x 3.5/8"	<b>Reduced Straight Coupler</b>  <b>9600R</b> From: 1/4 x 3/16" To: 4.1/8 x 3.5/8"
<b>Street Male Adaptor</b>  <b>9604-2</b> From: 3/8 x 1/4" To: 3.1/8 x 3"	<b>Elbow</b>  <b>9607</b> From: 3/8" To: 4.1/8"	<b>Obtuse Elbow</b>  <b>9606</b> From: 1/4" To: 4.1/8"	<b>Street Obtuse Elbow</b>  <b>9606-2</b> From: 1/4" To: 4.1/8"	<b>Intermediate Elbow</b>  <b>9607-1</b> From: 5/8" To: 1.1/8"	<b>Street Elbow</b>  <b>9607-2</b> From: 3/8" To: 4.1/8"
<b>Fitting Elbow</b>  <b>9607-2-2</b> From: 5/8" To: 2.5/8"	<b>Fitting Slow Bend</b>  <b>9607-2-2LT</b> From: 1/2" To: 3.1/8"	<b>Street Intermediate Elbow</b>  <b>9607-2I</b> From: 5/8" To: 1.1/8"	<b>Street Slow Bend</b>  <b>9607-2LT</b> From: 1/4" To: 3.1/8"	<b>Slow Bend</b>  <b>9607LT</b> From: 1/4" To: 1.5/8 x 1.3/8"	<b>Return Bend</b>  <b>9624</b> From: 1/4" To: 2.1/8"
<b>Tee - Equal</b>  <b>9611</b> From: 1/4" To: 4.1/8"	<b>Suction Line P Trap</b>  <b>9698</b> From: 5/8" To: 2.1/8"	<b>Straight Union Coupler</b>  <b>9733</b> From: 3/4" To: 7/8"	<b>Fitting Plug</b>  <b>9616</b> From: 1/2" To: 5/8"	<b>Stop End</b>  <b>9617</b> From: 1/4" To: 4.1/8"	<b>Fitting Reducer - Flush Fit</b>  <b>9618</b> From: 3/8 x 1/4" To: 2.1/8 x 1.5/8"



\*Conex|Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: [technical@ibpgroup.com](mailto:technical@ibpgroup.com).

**Conex Universal Limited:** Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.  
 Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: [sales@ibpgroup.com](mailto:sales@ibpgroup.com) | Website: [www.conexbanninger.com](http://www.conexbanninger.com)

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

 an IBP GROUP company